

波纹电阻箱/柜(RA/HRA)

Wire Wound Resistor Assemblies/High Power Wire Wound Resistor Assemblies

■ 产品概述(Product Introduction)


RA/HRA系列产品是由波纹电阻器组合而成的电阻箱

RA/HRA is a resistor box assembled with wire wound resistors.


RA额定功率范围Rated Power Range of RA: 0.5 ~ 12.5kW

HRA额定功率范围Rated Power Range of HRA: 20 ~ 200kW

■ 产品尺寸图(Product Size)

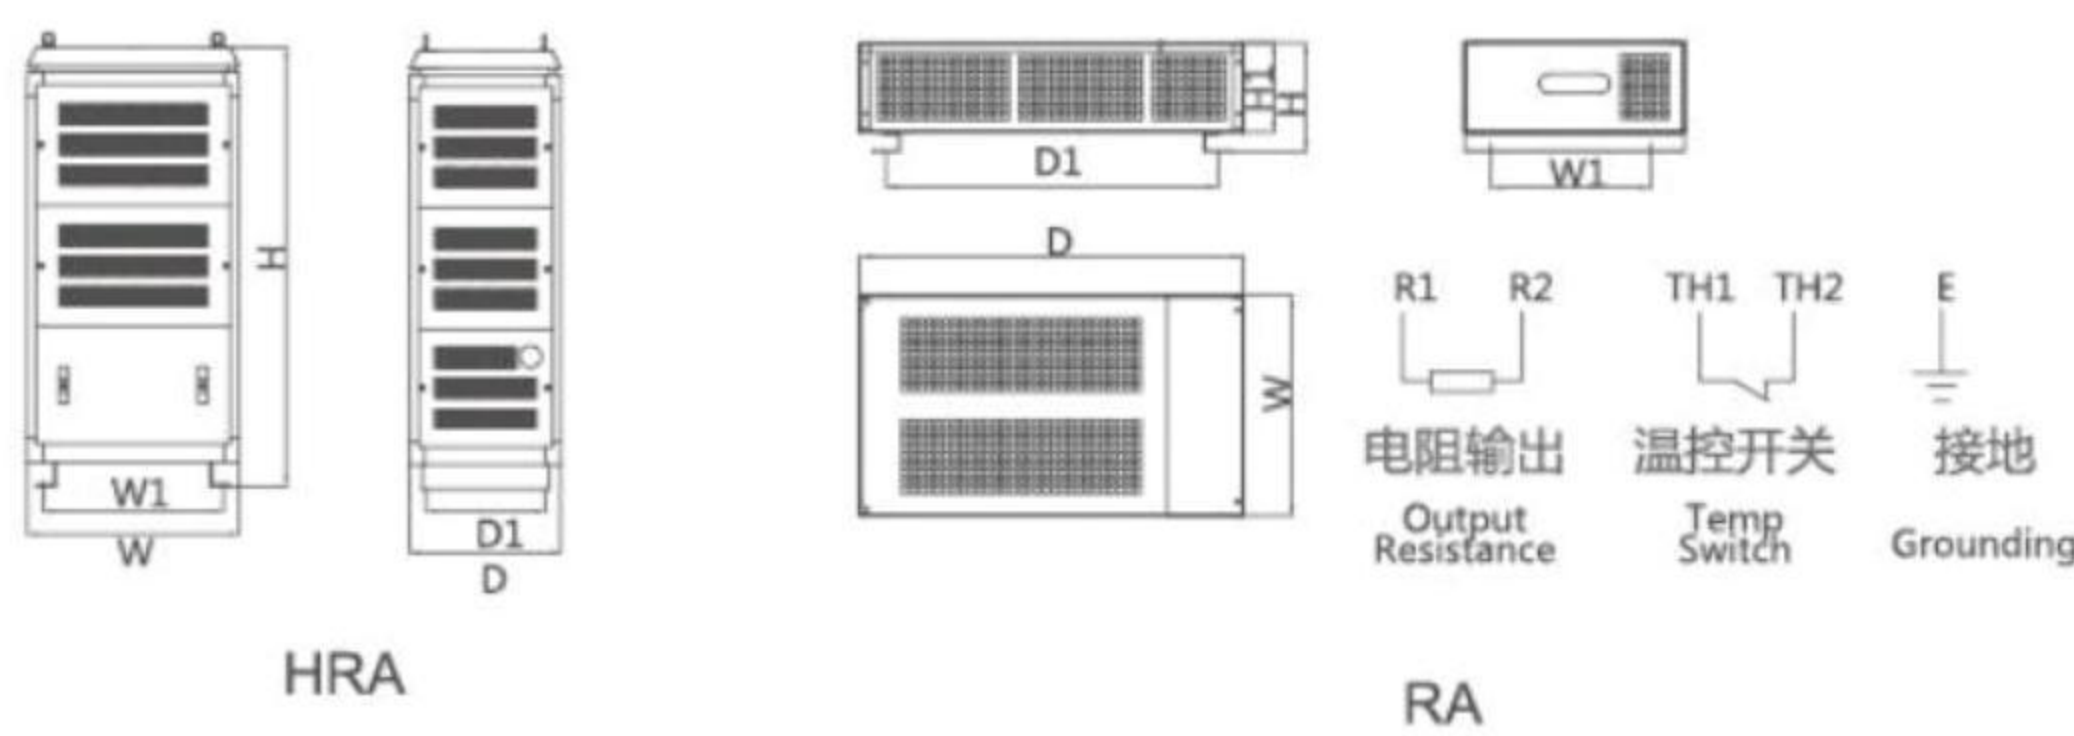

典型电路图
Typical Circuit Diagram

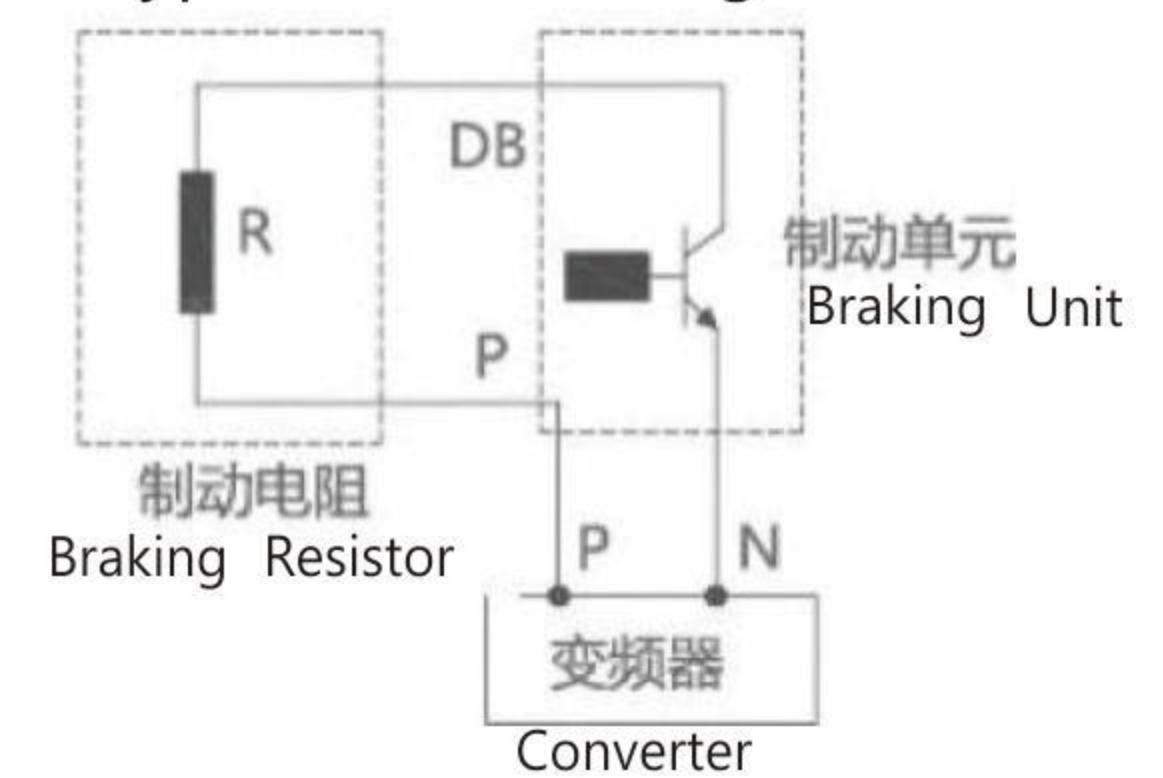

规格 Type	功率(kW) Power	尺寸Dimension(±1mm)					端子台螺钉 Terminal	重量(kg) Weight	配线(mm) Cable	组合 Combination
		W	D	H	W1	D1				
RA	1	242	500	140	150	470	M6	5.3	6	1kW*1
	2	242	500	140	150	470	M6	6.5	6	1kW*2
	3	242	500	140	150	470	M6	7.8	6	1.5kW*2
	4.5	345	600	170	325	530	M6	12	10	1.5kW*3
	6	345	600	170	325	530	M6	14	10	1.5kW*4
	8	415	690	170	395	665	M6	16.5	10	2kW*4
	10	415	690	170	395	665	M6	18.5	16	2KW*5
HRA	12.5	415	690	170	395	665	M6	20	16	2.5kW*5
	20	700	500	84.5	340	620	M6	50	160	2.5kW*8
	40	700	500	124.5	340	620	M6	86	25	2.5kW*16
	50	700	500	144.5	340	620	M7	100	25	2.5kW*20
	60	700	500	164.5	340	620	M8	115	35	2.5kW*24
	80	700	500	204.5	340	620	M8	140	50	2.5kW*32
	100	700	700	204.5	540	620	M8	165	50	2.5kW*40
	120	700	800	194.5	640	620	M8	190	75	2.5kW*48

供选配件：散热轴流风机，户外防雨百叶窗盖板，底部轮子。

For options: cooling axial flow fan, outdoor rainproof shutter cover, and bottom wheel

备注：其他规格尺寸，可根据用户要求制造。Remark: Customized if necessary.

■ 成品识别码(Product Identification Code)

RA	6kW	20R	J
RA: Resistor Assemblies HRA: High Power Resistor Assemblies	额定功率 Rated Power	电阻阻值 Resistance	阻值误差 Resistance Tolerance H=±3% J=±5% K=±10%